

Construction and Feature


- Capable of switch electric circuit with load
- Provide function of isolation
- Used as main switch for household and similar installation



Technical Data

- Pole No.: 1, 2, 3, 4
- Rated current(A): 16, 25, 40, 63, 80, 100, 125
- Rated voltage: AC 230/400V
- Rated frequency: 50/60Hz
- Rated short-circuit making capacity: 3kA
- Rated withstand current: 1.8kA within 1sec
- Electro-mechanical endurance: 10000 cycles
- Connection capacity: Rigid conductor 35mm²
- Connection terminal: Pillar terminal with clamp
- Installation:
 - On symmetrical din rail 35.5mm
 - Panel mounting
- Terminal Connection Height: H=21mm

Wiring Diagram

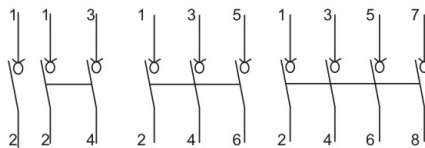

Overall & Installation Dimensions

